

DOOR LEVER INSTALLATION INSTRUCTIONS

TOOLS YOU WILL NEED

Measurement Tape Drill Bits Needed: 1/8", 7/8", 1" 2-1/8" Hole Saw Pencil Chisel


FOR DOORS WITH EXISTING HOLES

<p>1</p> <p>Measure Door Width If the door is thinner than 1-3/8" or thicker than 1-3/4", then the lock will not fit properly on the door.</p>	<p>2</p> <p>Measure for Basket If existing basket is not 2-3/8" or 2-3/4", then the lock will not fit properly on the door.</p>	<p>3</p> <p>Measure Hole Sizes If Hole sizes are larger than those shown, then the lock will not fit properly on the door. If hole sizes are smaller than those shown, see steps 4 and 5.</p>
<p>4</p> <p>If Needed, Enlarge Hole in Door If hole in door is smaller than 2-1/8", then use 2-1/8" hole saw to enlarge</p>	<p>5</p> <p>If Needed, Enlarge Hole in Dore Edge If hole in door edge is smaller than 7/8" or 1", then use 7/8" or 1" drill bit to enlarge hole.</p>	<p>6</p> <p>Check Strike (Door Jamb) Preparation</p> <ol style="list-style-type: none"> Place new strike against door jamb. If strike does not fit properly, use pencil to trace around strike and mark hole positions. If needed, use chisel and drill to correct door jamb preparation.

FOR NEW INSTALLATIONS

<p>1 MARK DOOR * see picture 2 for details</p> <ol style="list-style-type: none"> Measure up approximately 36" from the door bottom. Apply template to the door edge. Mark center of door edge as indicated on template. Mark center hole on door face through guide on template for 2-3/8" (60mm) or 2-3/4" (70mm) basket.
<p>2 DRILL HOLES * see picture 3 for details</p> <ol style="list-style-type: none"> Drill 2" or 2-1/8" hole through door face as marked for lockset: It is recommended that holes be drilled from both sides to prevent splitting. Drill 31/32" or 1" hole in center of door edge for latch. Check template for correct size for your latch application. <p style="text-align: right;">* see picture 5 for details</p>

INSTALL HARDWARE

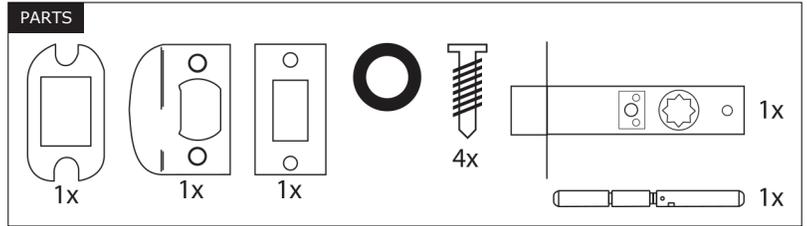

1

Make sure threaded side faces into the room.

Insert latch into pre drilled door. 2 3/8 backset ships standard, 2 3/4 optional on request.

2

Remove "O" ring from the spindle.

Make sure this groove goes inside the privacy room.

3

Insert spindle into the latch.

Insert "O" ring into the groove on spindle. (1 ring is extra)

4

Install Handles.

5

Use provided screws to secure both handles together.

Make sure to hold latch and both handles in correct position before tightening.

6

Install Rosette.

Make sure to align privacy pin hole on handle and rosette.

7

Pull and Turn the latch to adjust swing direction.

Pull

Turn

8

Install Latch Plate

9

Install privacy pin (if needed). For passage function, do not install.

10

Install plastic Dust Cover into the jamb.

11

Install Strike Plate into the Jamb.